




STAR MICROWAVE, INC. ELECTRICAL DATA SHEET


25 Jul 2003 04:01:17

CH1 LOG .2 dB/ REF -.25 dB
S21 3--13140 dB 2 000.000 000 MHz

CH2 LOG 5 dB/ REF -21 dB
S12 3--26.443 dB 2 000.000 000 MHz

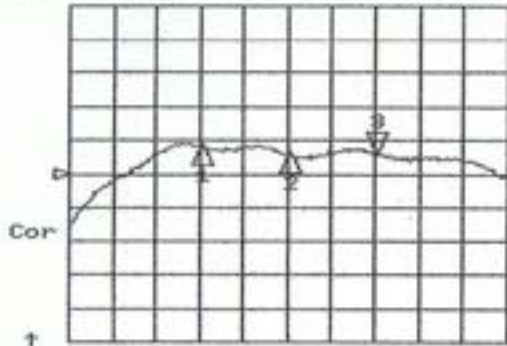


CH1 Markers
1--.00070 dB
1.00000 GHz
2--.12750 dB
1.90000 GHz

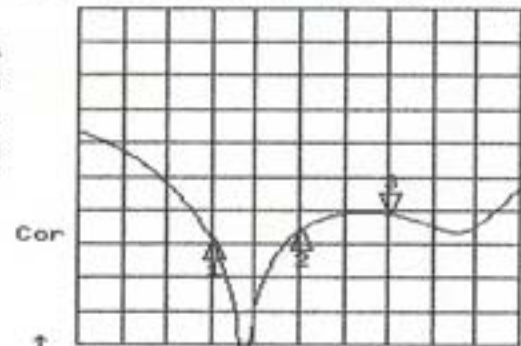


CH
1--
1.
2--
1.

CENTR 1900.000 MHz SPAN 500.000 MHz
CH3 LOG 5 dB/ REF -21 dB
S11 3--33.746 dB 2 000.000 000 MHz

START 1650.000 MHz STOP 2150.000 MHz
CH4 LOG 5 dB/ REF -21 dB
S22 3--30.400 dB 2 000.000 000 MHz

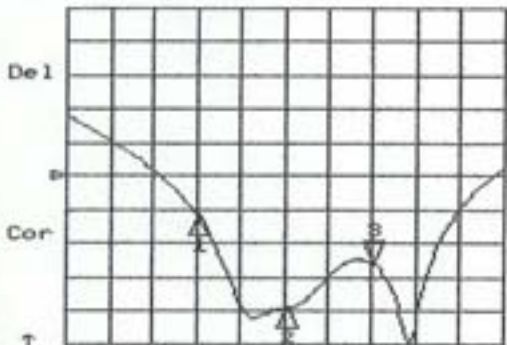


CH3 Markers
1--26.019 dB
1.00000 GHz
2--40.506 dB
1.90000 GHz

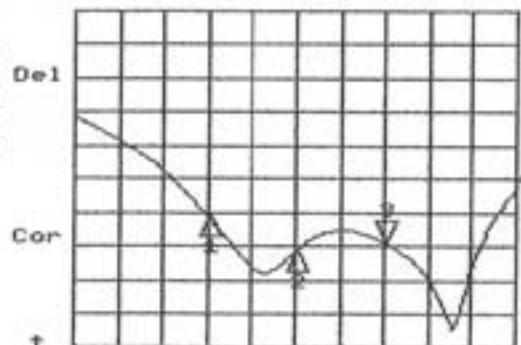

CH
1--
1.
2--
1.

CENTR 1900.000 MHz SPAN 500.000 MHz

START 1650.000 MHz STOP 2150.000 MHz

Temp:	Room Temp.	Lot No.		 STAR MICROWAVE, INC.
Job No.		Tested By		
Model No.	ETI0185-BL	Date:		
Serial No.		Q.A.		
			Date	