


★ STAR MICROWAVE, INC. ELECTRICAL DATA SHEET


25 Jul 2003 04:01:17

CH1 LOG .2 dB/ REF -.25 dB
S21 3:-.13140 dB 2 000.000 000 MHz

CH2 LOG 5 dB/ REF -21 dB
S12 3:-26.443 dB 2 000.000 000 MHz

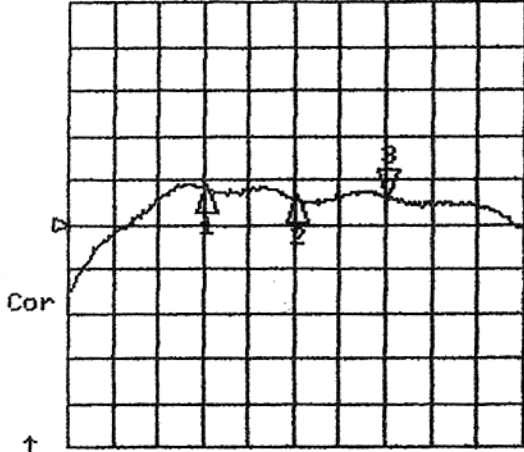

CH1 Markers
1:-.08070 dB
1.80000 GHz
2:-.12750 dB
1.90000 GHz

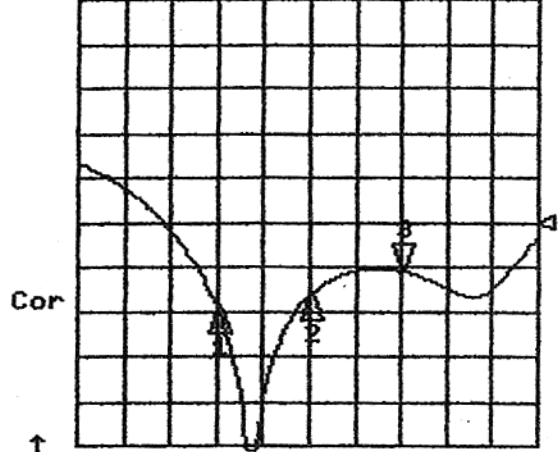


START 1650.000 MHz STOP 2150.000 MHz


CENTR 1900.000 MHz SPAN 500.000 MHz

CH3 LOG 5 dB/ REF -21 dB
S11 3:-33.746 dB 2 000.000 000 MHz

CH4 LOG 5 dB/ REF -21 dB
S22 3:-30.400 dB 2 000.000 000 MHz

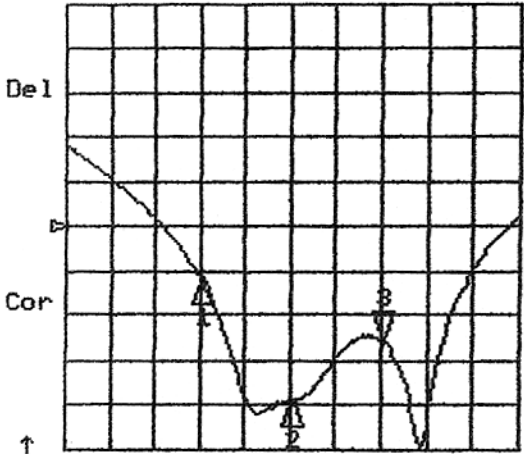

CH3 Markers
1:-26.819 dB
1.80000 GHz
2:-40.586 dB
1.90000 GHz

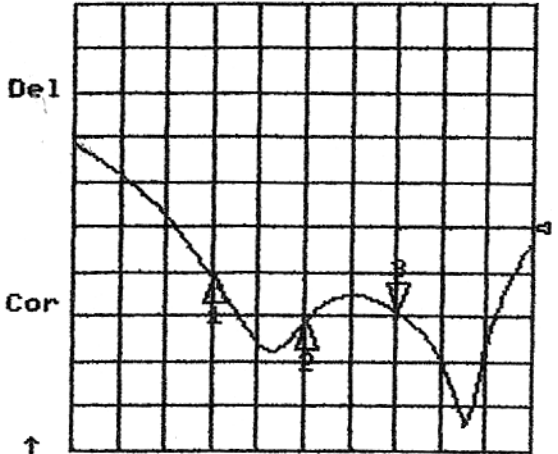

START 1650.000 MHz STOP 2150.000 MHz

CENTR 1900.000 MHz SPAN 500.000 MHz

Temp:	+25° C	Lot No.	
Job No.		Tested By	
Model No.	ETIO195-A3L	Date	
Serial No.		Q.A.	
		Date	

